

# MCU Protocol (T)Error

```
⚠ Klipper reports: ERROR

MCU Protocol error

This is frequently caused by running an older version of the
firmware on the MCU(s). Fix by recompiling and flashing the
firmware.

Your Klipper version is: v0.12.0-102-g9f41f53c
MCU(s) which should be updated:
mcu: Current version v0.12.0-85-gd785b396
EBBCan: Current version v0.12.0-58-g25bc649c
RPi: Current version v0.12.0-58-g25bc649c
Up-to-date MCU(s):
<none>

Once the underlying issue is corrected, use the "RESTART"
command to reload the config and restart the host software.

mcu 'EBBCan': Command format mismatch: query_adxl345 oid=%c rest_ticks=%u vs
query_adxl345 oid=%c clock=%u rest_ticks=%u
```

## YouTube Video #86




## Problem

Klipper meldet nach dem Updaten einen "MCU Protocol Error".

## Lösung 1 - Recover

- `cd ~/klipper`
- `git checkout 94719fe`
  - Ist identisch mit `git checkout v0.12.0-75-g94719fe3`
- `sudo reboot`
- ggf. Detached → Soft Recovery

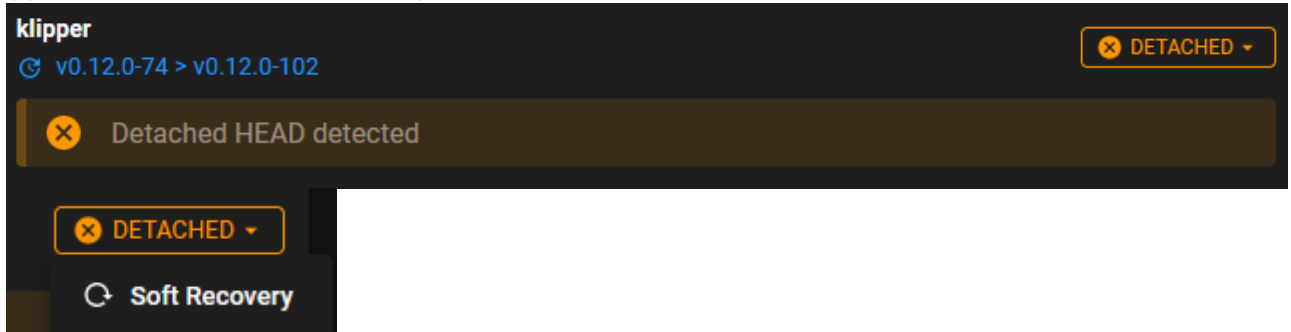

- `sudo reboot`

## Lösung 2 - ADXL345 auskommentieren

- ADXL345 in der `printer.cfg` auskommentieren
- Klipper neu starten

## Lösung 3 - Sicherung

- bestehende Sicherung zurückspielen



## Lösung 4 - Updates einspielen

- Update der ADXL MCU reicht
- Generell sollten wenn möglich alle MCU's auf einen aktuellen Stand gebracht werden

From:  
<https://www.drklipper.de/> - Dr. Klipper Wiki

Permanent link:  
[https://www.drklipper.de/doku.php?id=klipper\\_faq:mcu\\_protocol\\_t\\_error](https://www.drklipper.de/doku.php?id=klipper_faq:mcu_protocol_t_error)

Last update: **2024/01/31 21:04**

